


ARBOKOL 1025 SWIMMING POOL GRADE

DESCRIPTION

Arbokol 1025 SP is a unique two part Epoxy sealant which cures to form a hard wearing seal, designed to accommodate small amounts of movement in extension but considerable movement in compression.

Recommended for use in a variety of internal stress relief joint systems where continual water resistance and a high degree of chemical resistance (especially to common cleaning substances) are required.

MAIN APPLICATIONS

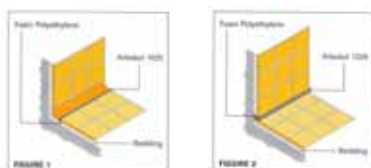

Swimming pools, compression joints, tile to tile joints (no primer required), long term water immersed joints, shower rooms.

NB. Not recommended for structural joints

PACKAGING

1.2 Litre Set, with separate tins for Base and Curing Agent
Follower plate

COLOURS

Off White, Grey

APPLICATION INSTRUCTIONS

Joint Preparation

The joint surfaces must be clean and free from all contamination. Surfaces should be degreased using the appropriate surface cleaner (contact Adshead Ratcliffe Technical Service Department for further information).

Mixing

The ratio of base to curing agent controls the performance properties of Arbokol 1025 SP and tins are filled off to an exact mixing ratio. It is vital therefore that the whole contents of the curing agent tin are added to the base tin. The 2 components must be thoroughly mixed to ensure complete homogeneity (Spiral "pig tail" mixing equipment is recommended).

Application

The usual application method once mixed is to fill the sealant into empty cartridge dispensers using the follower tin supplied with the pack. The cartridge is placed over the hole in the centre of the plate and filled by applying steady downward pressure. Insert the plunger into the cartridge and the mixed sealant is then ready for application using an Arbo Caulking Gun. The sealant should be extruded firmly into the joint by maintaining an even pressure on the trigger of the gun.

Joint Backing

Where applicable, appropriate joint filler, e.g. closed cell polyethylene foam should be used to provide the correct joint depth.

All joint preparation and sealant application should be carried out in accordance with BS8000 Part 16 (British standard for the sealing of joints in buildings)

Joint Size Suitability

Joint Width
Minimum 6mm
Maximum 20mm (single application)

Joint Depth

Minimum 10mm on porous substrates
Minimum 6mm on non porous substrates
Maximum 10mm

Width: Depth Ratio

Contact Adshead Ratcliffe Technical Service Department

HEALTH AND SAFETY

Base component is Polyamide based and curing agent contains Epoxy resin. Both components require careful handling. Please consult MSDS's for each component before use.

TECHNICAL DATA

Typical Shore D Hardness	
(cured at 20° C):	60 – 70
Work Life (Typical at 20° C):	45 minutes
Application Temperature:	+10° C to + 40° C
Service Temperature:	-20° C to +90° C
Cure Rate (at 20° C):	48 hours. At lower temperatures cure rate will be extended.
Chemical Resistance:	Resistant to most alkalis and dilute acids, petrol, diesel, jet fuel. Resistant to most cleaning chemicals used in swimming pool situations (neat Hypochlorite crystals should not be applied to 1025 SP).
Service Life:	20 years + in non critical applications. Use in swimming pools will lower this figure (depending upon application performance required).
Movement Accommodation:	Tension 5% Compression 50 %

ACCESSORIES

Cleaners

Arbo Cleaner 17 - 1 litre Tin
(Xylene based – not suitable for use with plastics or delicate finishes)

Arbo Cleaner 16 – 1 Litre Tin
(Alcohol Based)

**ARBOKOL 1025
SWIMMING POOL GRADE****EQUIPMENT**

Bulk Loading Guns
Heavy Duty Follower Plates

QUANTITY ESTIMATOR***Joint Size (mm) Metres/ 1.2 litre set***

6 x 6	33.3
9 x 6	23
12 x 9	11
20 x 10	6

Important: The information in this leaflet is given in good faith and based on results gained from experience and tests. However, all recommendations or suggestions are made without guarantee since the conditions of use are beyond our control. Goods are supplied subject to the Company's terms and conditions of sales, a copy of which is available on request.

Arbo sealants are manufactured in the U.K. by Adshead Ratcliffe.